

3M

Electrically Conductive Aluminum Tape 3302


Information Sheet

Product Description



3M™ Electrically Conductive Aluminum Tape 3302 is a 2.0 mil (50 micron) high strength dead soft aluminum foil coated with specially formulated conductive pressure sensitive acrylic adhesive system. Good adhesion, malleability and adhesive conductivity allow for extremely low resistance and make this an excellent shielding tape. Designed to meet a wide variety of EMI and RFI shielding applications in the electronics industry. Also for use in printed circuit manufacture and repair.

Product Construction

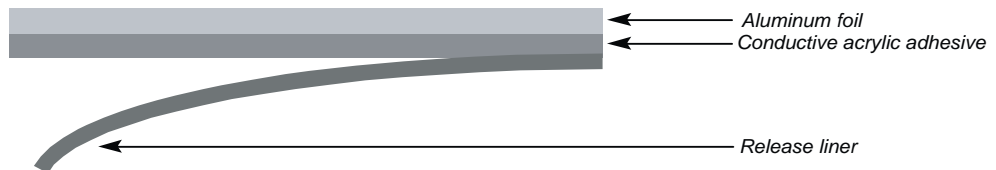

Features & Benefits

- UL 510 Listed
- Malleable aluminum foil conforms well to irregular contours
- Ideal for EMI and RFI shielding applications
- Good “wetting out” capabilities to most surfaces

Typical Physical Properties

If technical data is required, please contact your 3M sales professional or customer service representative to enter a technical service request for the specific data needed.